


THIS PRINT IS THE PROPERTY OF EDRIVE ACTUATORS, INC. AND REPRESENTS A PROPRIETARY ARTICLE TO WHICH EDRIVE ACTUATORS, INC. RETAINS THE EXCLUSIVE RIGHT OF USE AND/OR MANUFACTURE AND/OR SALE. THE PRINT OR THE ARTICLE SHOWN HEREON MAY NOT BE REPRODUCED.

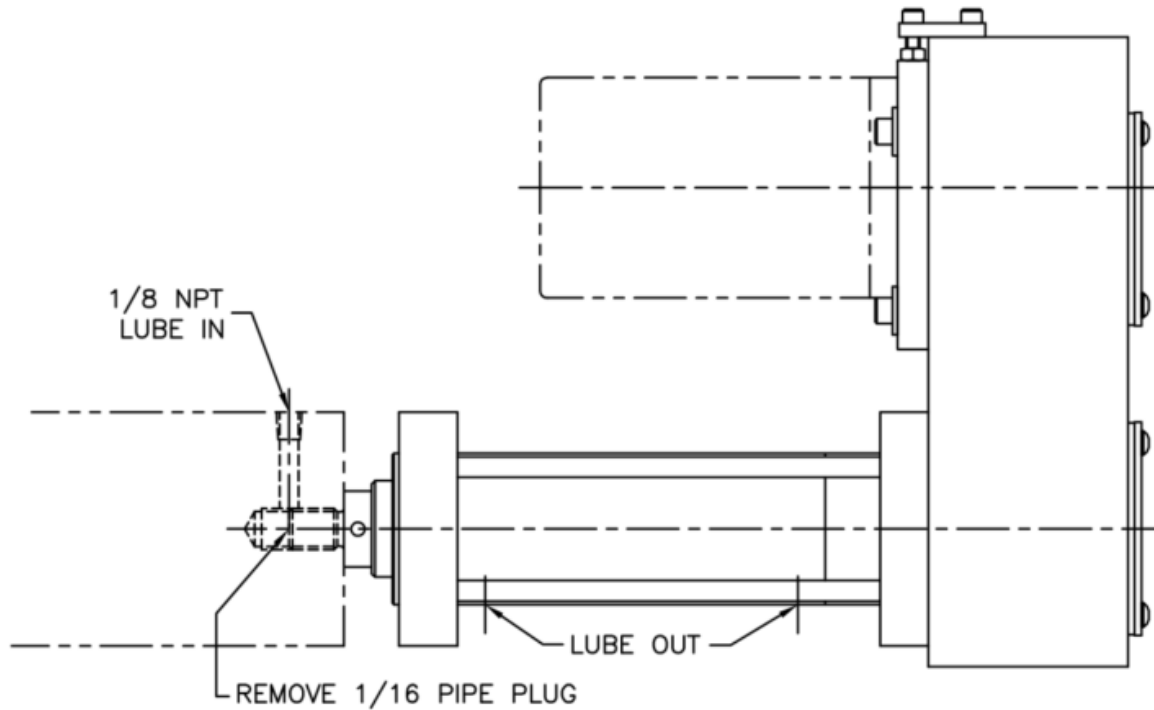

NOTE:

1. Lubricating oil must be a high grade "Way Oil" of 345 to 365 SUS viscosity, i.e. Mobil Vactra # 2.
2. Fill each Actuator with 8 oz. of oil before each use.
3. Each Actuator must receive 1-1/2 drops of oil per minute.
Ref.: 1 Drop=0.003 in.³

 EDrive Actuators, Inc. • 385 Stamm Road • Newington, Connecticut		
SCALE	NONE	DRAWN BY TCP
DATE	5-91	
DRAWING NAME		
ACTUATOR LUBE, METERED SYSTEM		
FOR		DRAWING NUMBER
		B-956