


## EDrive Actuators – Drawing

Title: Oil Air Mist for Ambient Temperatures Greater Than 110 degrees F

THIS PRINT IS THE PROPERTY OF EDRIVE ACTUATORS, INC. AND REPRESENTS A PROPRIETARY ARTICLE TO WHICH EDRIVE ACTUATORS, INC. RETAINS THE EXCLUSIVE RIGHT OF USE AND/OR MANUFACTURE AND/OR SALE. THE PRINT OR THE ARTICLE SHOWN HEREON MAY NOT BE REPRODUCED.

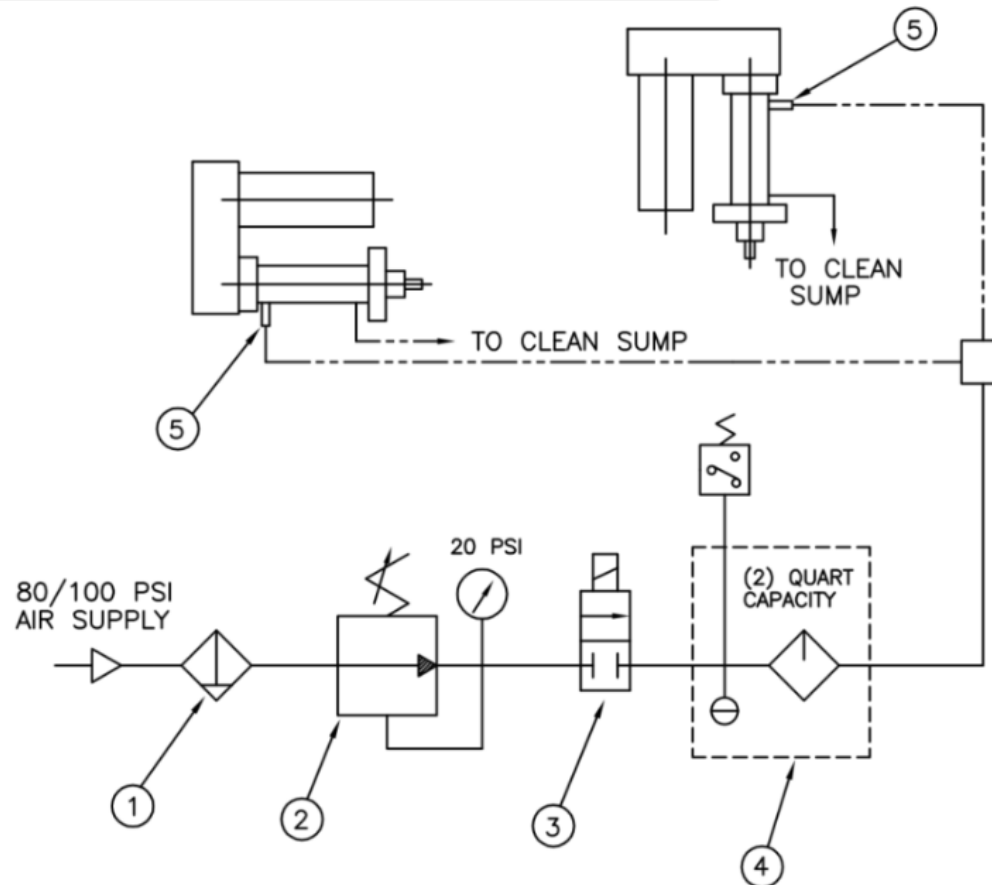

\* EXAMPLE: 15 DROPS AT LUBE FOR 1-1/2 DROPS AT ACTUATOR.

- NOTES:
1. USE MOBIL MIST LUBE #27; 481 S.U.S. VISCOCITY @ 100° F.
  2. OIL LINES TO BE 1/4" TUBING.
  3. LINES TO BE APPROXIMATELY EQUAL IN LENGTH WHEN LUBRICATING MORE THAN ONE ACTUATOR..
  4. EACH ACTUATOR MUST RECEIVE 1-1/2 DROPS PER MINUTE.
  5. REF. 1 DROP = .003 CUBIC INCHES.
  6. FOR START-UP AND ADJUSTMENTS SEE LUBRICATORS MANUFACTURERS INSTRUCTIONS.
  - \* 7. 10:1 RATIO AT LUBRICATOR

5	AS REQD	RECLASSIFIER	NORGREN 18-009-014
4	1	LUBRICATOR w/SWITCH	NORGREN 10-015-005-3A
3	1	SOLENOID	ALCON U21-44-21-12
2	1	REGULATOR	NORGREN R73G-2AK-RFG
1	1	FILTER	NORGREN F73G-2AN-AT2

ITEM	QTY	NAME	SPECIFICATION
------	-----	------	---------------

EDrive Actuators, Inc. • 385 Stamm Road • Newington, Connecticut			

SCALE	NONE	MATL:		DRAWN BY	SM
-------	------	-------	--	----------	----

DATE	9-84				
------	------	--	--	--	--

DRAWING NAME	LUBRICATION DIAGRAM
--------------	---------------------

FOR	AMBIENT TEMPERATURE'S > 110° F	DRAWING NUMBER	B-251A-1
-----	--------------------------------	----------------	----------

A	JLP	1-99	UPDATED P/N'S
REV.	BY	DATE	CHANGE